

MAC-10D-WV Diesel Transporter

West Virginia



APPROVED !

- Four-wheel fully enclosed spring applied wet disc brakes.
- Soft Ride five point rubber mounted front suspension with Air-Ride.
- Hydrostatic transmission with 14,000# planetary wheel units.
- Deutz 74 hp Diesel Engine.
- Fourteen passengers.
- Automatic parking brake.
- Low Speed: 11 MPH.
- High Speed: 15 MPH.
- Automatic/Manual Fire Suppression system.
- Engine in rear provides traction, ease of service, and places noise behind passengers.
- Combifilter after treatment system to comply with WV regulations.



DAMASCUS
Corporation

"We get around UNDERGROUND!!"



Phone: 276-676-2376 or 800-390-7636

Mailing Address:

PO Box 610

Abingdon, VA 24212

<http://www.damascuscorp.com>



Fax: 276-676-0300

Shipping Address:

26864 Watauga Road

Abingdon, VA 24211

e-mail: damascus@naxs.com

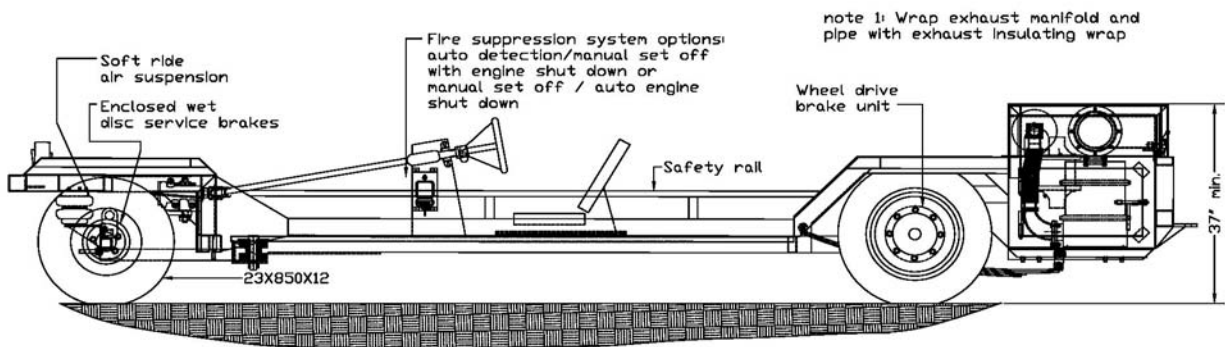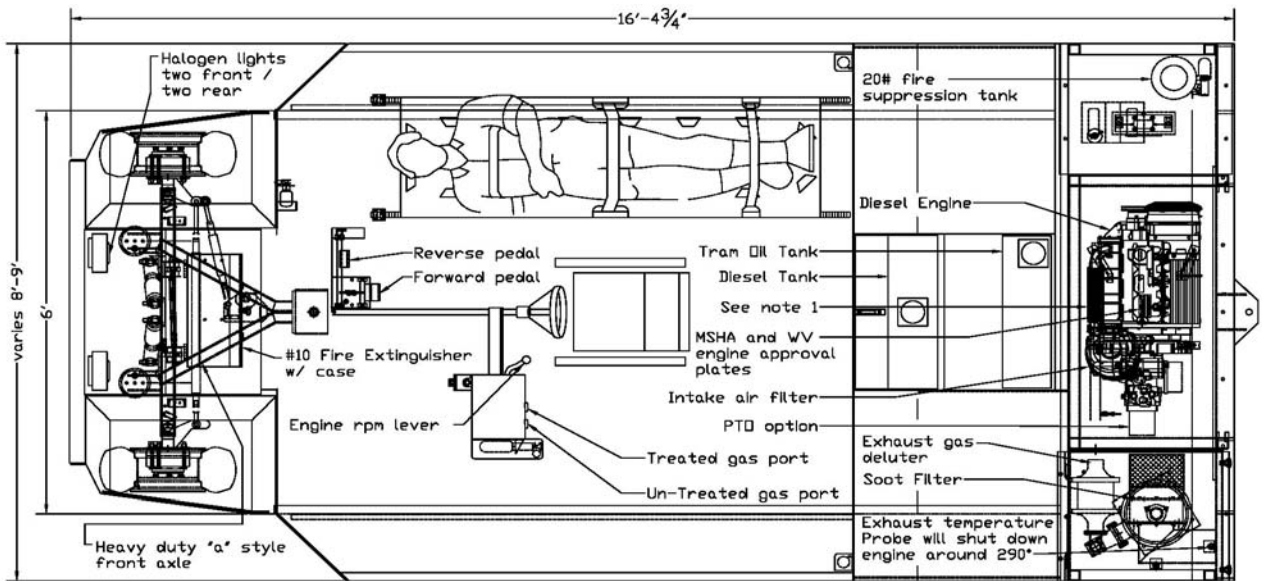

Specifications: MAC-10D-WV Diesel Transporter

Dimensions:	Height: 37" min. Width: 8'-0" or 9'-0" Length: 16'-4 3/4"	Drive:	Hydrostatic, using dual wheel drive units mounted on support tube with planetary gearing, integral spring-applied brake, Wheel unit capacity 14000 lbs
	Turning Radius: 13'-6" I.S. Ground Clearance: 9" Standard	Suspension:	Front – Rubber mounted A frame style axle with new Soft Ride air suspension and heavy-duty gas shocks. Automotive type tie rods Rear – HD leaf springs with heavy duty gas shocks and rubber overload bumpers
Weight:	4500#		
Payload:	3500#, 14 passenger		
Performance:	Speed 15 max., maximum operating grade 18%	Fire Suppression:	Standard - Ansul automatic/manual actuated with engine shutoff "Check Fire System"
Engine:	Deutz BF4L2011 74 HP. Emissions package include S-9 combi-filter, purifier and is subject to approval by the West Virginia Diesel committee. Meets MSHA requirements under part 7, title 30 CFR for out-by use only.	Fire Extinguisher:	#10 fire extinguisher, bracket and guard
Electrical:	12 Volt	Tires:	Front: 23x850x12 -6 Ply / 27x850x15 -8 Ply Rear: 27x850x15 -8 Ply / 10-16.5 -8 Ply
Headlights:	Two front, two rear, halogen, 12volt	Capacities:	Diesel fuel – 12.25 gallons. Hydraulic oil – 12.6 gallons
Brakes:	Four-wheel wet disc brakes, spring applied, pressure release w/ automatic parking brake feature, rear hydrostatic holdback.	Options:	Canopy, SCSR Storage, Seating, and Tires. Contact Mfg. for more...