

New Lil'MAC Model LMA AC



- New AC controller w/ regenerative braking
- New AC 6 h.p. brushless high torque electric motor
- No forward/reverse contactors
- New heavy duty on-board charger
- 48V battery system
- 3 wheelers offer better maneuverability
- 1600# rear axle and bearings
- Local Damascus distributors you know and trust to give service after the sale

DAMASCUS
Corporation

"We get around UNDERGROUND!!"

Phone: 276-676-2376 or 800-390-7636

Mailing Address:

PO Box 610

Abingdon, VA 24212

<http://www.damascuscorp.com>


Fax: 276-676-0300

Shipping Address:

26864 Watauga Road

Abingdon, VA 24211

e-mail: damascus@naxs.com

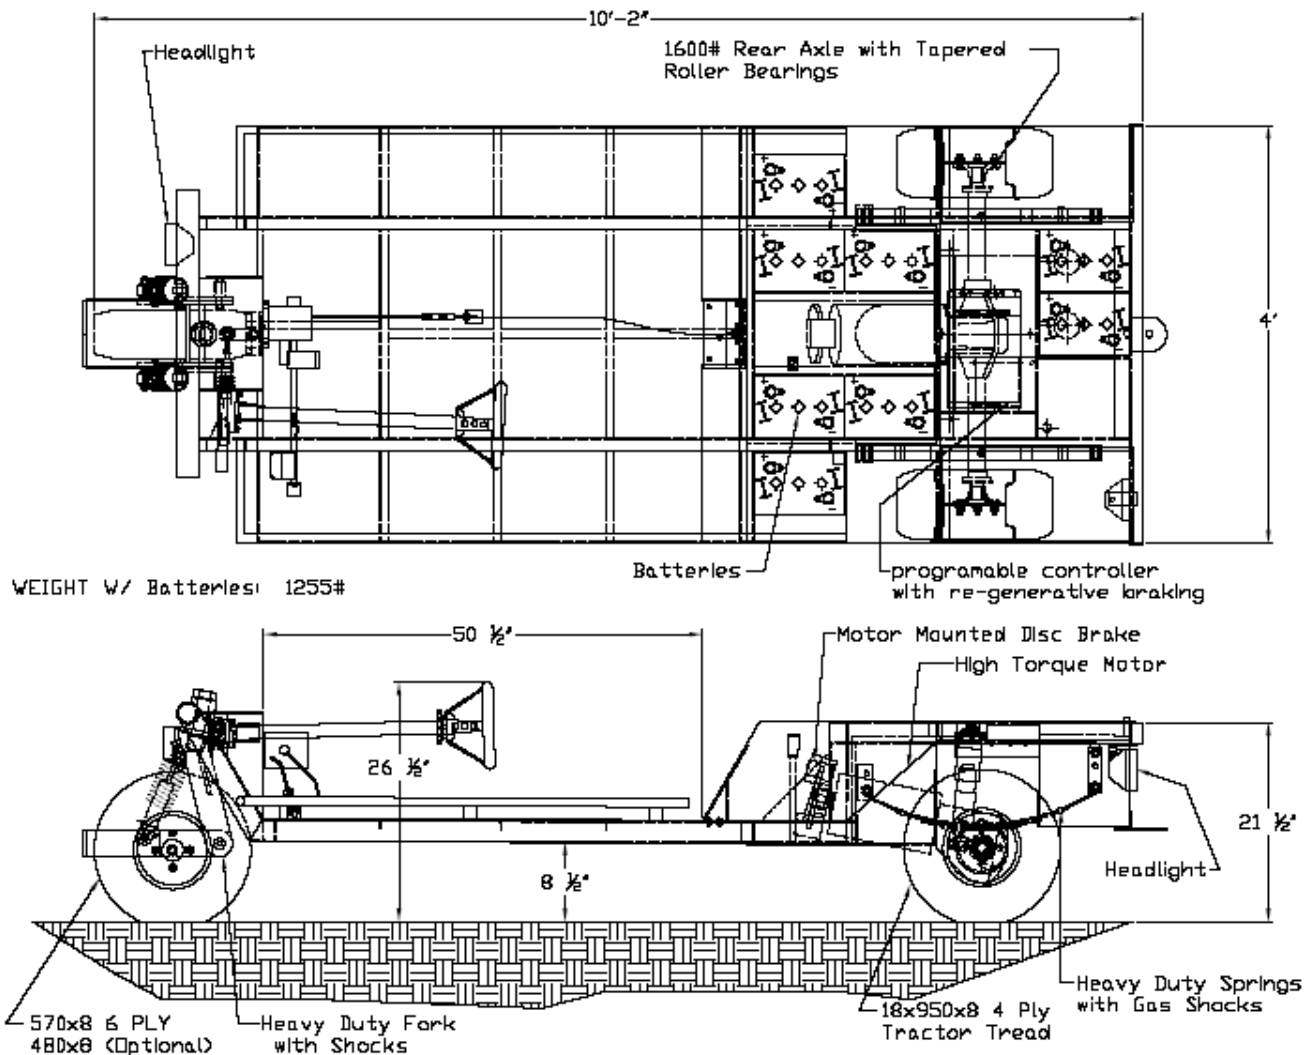

Specifications: Lil'MAC Transporter Model LMA-AC, Three Wheeler

Dimensions:	Height: 26½" std. to top of steering wheel. Width: 4'-0" standard. Length: 10'-2" Turning radius: 8'-7" I.S.	Motor:	6 horsepower – high torque, continuous Duty AC motor with no brushes or commutator
Ground Clearance:	8 1/2" standard.	Brake:	Re-Generative braking within electrical circuit assisted by mechanical disc/caliper brake, mounted on motor armature shaft, above deck out of mud and water.
Weight:	1255 pounds.	Rear Axle:	1600# rear axle with tapered roller bearings. Grease fittings at wheel bearings.
Payload:	2 person plus tools and equipment.	Front Suspension:	Heavy duty fork with shocks, coil springs, grease fittings at wheel bearings.
Electrical:	48 Volt AC programmable controller, no F/R contactors, manual battery disconnect.	Rear Suspension:	Heavy duty leaf springs with gas shocks.
Batteries:	6 Volt 145 minute @ 75 amp.	Tires:	Front: 570 x 8 – 6 ply rating. Rear: 18x9.50x8 –4 ply rating, tractor tread. Other sizes available.
Battery Charger:	Quiq Charge on-board automatic charger. Constant voltage Input: 115 volt –10 amp Output: 48 volt – 18 amps.	Tram Speed:	12 miles per hour, approx.
Headlights:	One front/rear, 12v	Options:	Seats, canopy, tires, lift kit, strobe light.